




TECHNICAL INFORMATION

ST28 FX

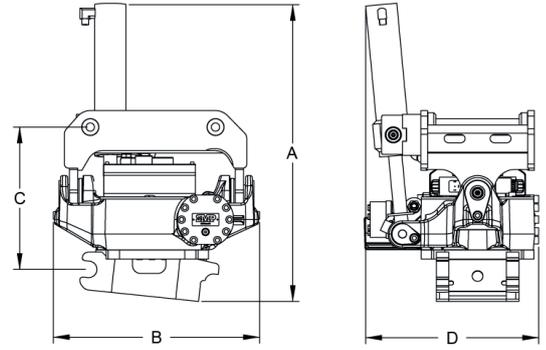

Model

ST28 FX

Specifications

Dimension A (mm)	1080
Dimension B (mm)	1020
Dimension C (mm)	670
Dimension D (mm)	860
Tilt angle max (°)	Up to 45°
Weight (kg)	770
Weight gripper (kg)	117/122 (S60/S70)
Width gripper opening (mm)	900

Dimensions, weights and tilt angle may vary depending on the configuration.

Performance figures

Standard swivel - Flow extra function (l/min)	60-65
High flow swivel - Flow through NG10 (l/min)	120
High flow swivel - Flow in "bypass" (l/min)	200
Tilting torque (Nm)	53
Rotation torque (kNm)	7

Features

Machine interface	Direct mount, S70 S70, FC70
Coupler	√
Double extra function (or gripper+extra)	√ (new!)
Load-holding valves on cylinder	Option
Telescopic cylinders	Option
Central lubrication point	√
High Flow swivel (120/200 l/min)	Option (new!)
GPS Gateway	Option

Carrier

Machine weight (t)	22 - 30
Max breakout force (kN)	180
Max breakout torque (kNm)	310
Max bucket width (mm)	2000

