



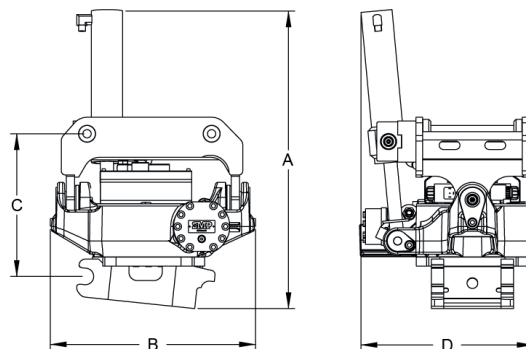

TECHNICAL INFORMATION

ST10 FX



Model

ST10 FX

Specifications

Dimension A (mm)	870
Dimension B (mm)	590
Dimension C (mm)	504
Dimension D (mm)	600
Tilt angle max (°)	Up to 45°
Weight (kg)	310
Weight gripper (kg)	83
Width gripper opening (mm)	650

Dimensions, weights and tilt angle may vary depending on the configuration.

Performance figures

Standard swivel - Flow extra function (l/min)	60-65
High flow swivel - Flow through NG10 (l/min)	-
High flow swivel - Flow in "bypass" (l/min)	-
Tilting torque (Nm)	25,3
Rotation torque (kNm)	5

Features

Machine interface	Direct mount, S45, FC45, S50
Coupler	S40, S45, FC45, S50
Double extra function (or gripper+extra)	✓
Load-holding valves on cylinder	✓
Telescopic cylinders	Option
Central lubrication point	✓
High Flow swivel (120/200 l/min)	-
GPS Gateway	Option

Carrier

Machine weight (t)	6 - 10
Max breakout force (kN)	70
Max breakout torque (kNm)	75
Max bucket width (mm)	1400