




## TECHNICAL INFORMATION

# ST15 FX

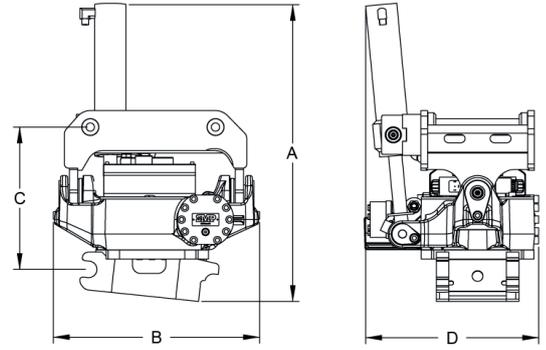

### Model

ST15 FX

### Specifications

Dimension A (mm)	905
Dimension B (mm)	726
Dimension C (mm)	547
Dimension D (mm)	665
Tilt angle max (°)	Up to 45°
Weight (kg)	415
Weight gripper (kg)	83/117/122 (S45-50/S60/S70)
Width gripper opening (mm)	650/900 (S45-50/S60)

*Dimensions, weights and tilt angle may vary depending on the configuration.*

### Performance figures

Standard swivel - Flow extra function (l/min)	60-65
High flow swivel - Flow through NG10 (l/min)	120
High flow swivel - Flow in "bypass" (l/min)	200
Tilting torque (Nm)	34,1
Rotation torque (kNm)	7

### Features

Machine interface	Direct mount, S45, FC45, S50, S60
Coupler	S45, S50, S60, FC60
Double extra function (or gripper+extra)	✓
Load-holding valves on cylinder	✓
Telescopic cylinders	Option
Central lubrication point	✓
High Flow swivel (120/200 l/min)	Option (new!)
GPS Gateway	Option

### Carrier

Machine weight (t)	10 - 16
Max breakout force (kN)	110
Max breakout torque (kNm)	143
Max bucket width (mm)	1500

