



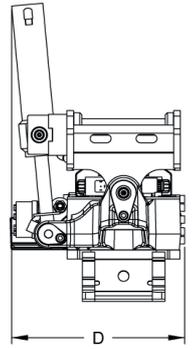

## TECHNICAL INFORMATION

# ST18 FX

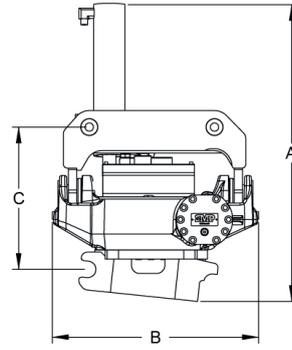

### Model

ST18 FX

### Specifications

Dimension A (mm)	920
Dimension B (mm)	770
Dimension C (mm)	587
Dimension D (mm)	810
Tilt angle max (°)	Up to 45°
Weight (kg)	553
Weight gripper (kg)	83/117/122 (S45-50/S60/S70)
Width gripper opening (mm)	900

*Dimensions, weights and tilt angle may vary depending on the configuration.*

### Performance figures

Standard swivel - Flow extra function (l/min)	60-65
High flow swivel - Flow through NG10 (l/min)	120
High flow swivel - Flow in "bypass" (l/min)	200
Tilting torque (Nm)	46
Rotation torque (kNm)	6

### Features

Machine interface	Direct mount, S60, FC60, S70, FC70
Coupler	S60, FC60, S70, FC70(?)
Double extra function (or gripper+extra)	✓
Load-holding valves on cylinder	✓ (new!)
Telescopic cylinders	Option
Central lubrication point	✓
High Flow swivel (120/200 l/min)	Option (new!)
GPS Gateway	Option

### Carrier

Machine weight (t)	14 - 18
Max breakout force (kN)	130
Max breakout torque (kNm)	185
Max bucket width (mm)	1800

