




TECHNICAL INFORMATION

ST22 FX

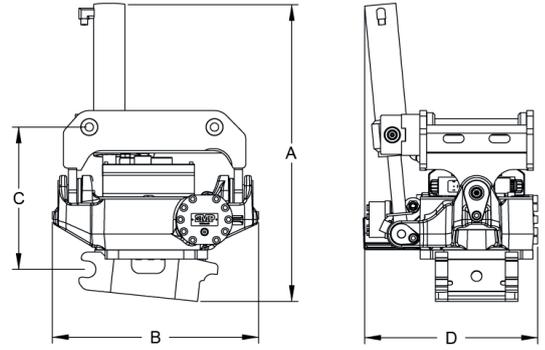

Model

ST22 FX

Specifications

Dimension A (mm)	1000
Dimension B (mm)	830
Dimension C (mm)	623
Dimension D (mm)	830
Tilt angle max (°)	Up to 45°
Weight (kg)	628
Weight gripper (kg)	117/122 (S60/S70)
Width gripper opening (mm)	900

Dimensions, weights and tilt angle may vary depending on the configuration.

Performance figures

Standard swivel - Flow extra function (l/min)	60-65
High flow swivel - Flow through NG10 (l/min)	120
High flow swivel - Flow in "bypass" (l/min)	200
Tilting torque (Nm)	52
Rotation torque (kNm)	7

Features

Machine interface	Direct mount, S60, FC60, S70, FC70
Coupler	S60, FC60, S70, FC70
Double extra function (or gripper+extra)	✓
Load-holding valves on cylinder	✓ (new!)
Telescopic cylinders	Option
Central lubrication point	✓
High Flow swivel (120/200 l/min)	Option (new!)
GPS Gateway	Option

Carrier

Machine weight (t)	16 - 22
Max breakout force (kN)	150
Max breakout torque (kNm)	230
Max bucket width (mm)	2000

