




TECHNICAL INFORMATION

ST6 FX

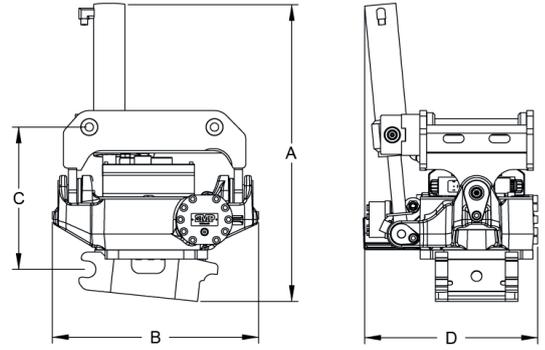

Model

ST6 FX

Specifications

Dimension A (mm)	720
Dimension B (mm)	495
Dimension C (mm)	410
Dimension D (mm)	415
Tilt angle max (°)	Up to 45°
Weight (kg)	160
Weight gripper (kg)	60/78 (S40/S45-50)
Width gripper opening (mm)	460/650 (S40/S50)

Dimensions, weights and tilt angle may vary depending on the configuration.

Performance figures

Standard swivel - Flow extra function (l/min)	60-65
High flow swivel - Flow through NG10 (l/min)	-
High flow swivel - Flow in "bypass" (l/min)	-
Tilting torque (Nm)	12,3
Rotation torque (kNm)	5

Features

Machine interface	Direct mount, S40, S45, S50
Coupler	S40, S45, S50
Double extra function (or gripper+extra)	Manual switch
Load-holding valves on cylinder	√
Telescopic cylinders	-
Central lubrication point	√
High Flow swivel (120/200 l/min)	-
GPS Gateway	Option

Carrier

Machine weight (t)	3 - 6
Max breakout force (kN)	50
Max breakout torque (kNm)	44
Max bucket width (mm)	1300

