
TECHNICAL INFORMATION



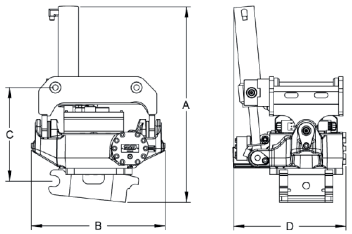

Model	ST15 FX

Specifications

Dimension A (mm)	1057
Dimension B (mm)	725
Dimension C (mm)	569
Dimension D (mm)	665
Maximum tilt angle (°)	45
Weight (kg)	415
Grapple weight (kg)	77/115 (S45-50/S60)
Grapple jaw opening width (mm)	738/896 mm (S45-50/S60-70)

Weights, dimensions, and tilt angle may vary depending on the configuration.

Performance Data

Standard swivel - Auxiliary function flow (l/min)	60-65
High-flow swivel - Flow through NG10 (l/min)	120
High-flow swivel - Bypass flow (l/min)	200
Tilt torque (kNm)	34,1
Rotation torque (kNm)	7

Features

Machine interface	Direct mount, S45, FC45, S50, S60
Coupler	S45, S50, S60, FC60
Double auxiliary function	V
Cylinder hose burst valves	V
Telescopic cylinders	Option
Central lubrication point	V
High-flow rotator (120/200 l/min)	Option (new!)
GPS gateway	Option

Carrier Machine

Machine weight (t)	10 - 16
Maximum breakout force (kN)	110
Maximum breakout torque (kNm)	143
Maximum bucket width (mm)	1500