
TECHNICAL INFORMATION



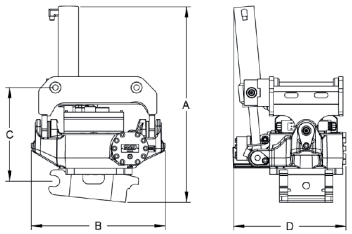

Model	ST22 FX

Specifications

Dimension A (mm)	1226
Dimension B (mm)	847
Dimension C (mm)	623
Dimension D (mm)	623
Maximum tilt angle (°)	45
Weight (kg)	640
Grapple weight (kg)	115/139 (S60/S70)
Grapple jaw opening width (mm)	896/939

Weights, dimensions, and tilt angle may vary depending on the configuration.

Performance Data

Standard swivel - Auxiliary function flow (l/min)	60-65
High-flow swivel - Flow through NG10 (l/min)	120
High-flow swivel - Bypass flow (l/min)	200
Tilt torque (kNm)	52
Rotation torque (kNm)	7

Features

Machine interface	Direct mount, S60, FC60, S70, FC70
Coupler	S60, FC60, S70, FC70
Double auxiliary function	Option
Cylinder hose burst valves	v
Telescopic cylinders	Option
Central lubrication point	Option
High-flow rotator (120/200 l/min)	
GPS gateway	

Carrier Machine

Machine weight (t)	22-30
Maximum breakout force (kN)	150
Maximum breakout torque (kNm)	230
Maximum bucket width (mm)	2000